


Adapter Sleeves

H 23

HE 23

HS 23


HA 23

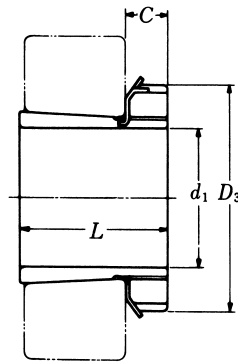

TAPER 1:12

Adapter ¹⁾ Part No.	d ₁				L mm	D ₃ mm	C mm	C ₁ ⁵⁾ mm	Lock Nut	Lock Washer	Weight (kgs)
	H mm	HE ²⁾ in	HS ³⁾ in	HA ⁴⁾ in							
H 2304	17	—	—	—	31	32	7	—	AN 04	AW 04	0.049
H 2305	20	¾	⅞	—	35	38	9	—	AN 05	AW 05	0.087
H 2306	25	1	⅞	⅟ ₁₆ ¹⁵	38	45	9	—	AN 06	AW 06	0.126
H 2307	30	—	1 ⅛	1 ⅜ ₁₆	43	52	10	—	AN 07	AW 07	0.165
H 2308	35	1 ¼	1 ⅜	1 ⅝ ₁₆	46	58	11	—	AN 08	AW 08	0.224
H 2309	40	1 ½	1 ⅝	1 ⅞ ₁₆	50	65	12	—	AN 09	AW 09	0.280
H 2310	45	1 ¾	1 ⅝	1 ⅟ ₁₆ ¹¹	55	70	13	—	AN 10	AW 10	0.362
H 2311	50	2	1 ⅞	1 ⅟ ₁₆ ¹⁵	59	75	13	—	AN 11	AW 11	0.420
H 2312	55	—	2 ⅛	—	62	80	13	—	AN 12	AW 12	0.481
H 2313	60	2 ¼	2 ⅜	2 ⅝ ₁₆	65	85	14	—	AN 13	AW 13	0.557
H 2314	60	—	—	—	68	92	14	—	AN 14	AW 14	0.897
H 2315	65	2 ½	—	2 ⅞ ₁₆	73	98	15	—	AN 15	AW 15	1.050
H 2316	70	2 ¾	—	2 ⅟ ₁₆ ¹¹	78	105	17	—	AN 16	AW 16	1.280
H 2317	75	3	—	2 ⅟ ₁₆ ¹⁵	82	110	18	—	AN 17	AW 17	1.450
H 2318	80	—	—	3 ⅜ ₁₆	86	120	18	—	AN 18	AW 18	1.690
H 2319	85	3 ¼	—	—	90	125	19	—	AN 19	AW 19	1.920
H 2320	90	3 ½	—	3 ⅞ ₁₆	97	130	20	—	AN 20	AW 20	2.150
H 2321	95	—	—	—	101	140	20	—	AN 21	AW 21	2.460
H 2322	100	4	—	3 ⅟ ₁₆ ¹⁵	105	145	21	—	AN 22	AW 22	2.740
H 2324	110	4 ¼	—	4 ⅜ ₁₆	112	155	22	—	AN 24	AW 24	3.190
H 2326	115	4 ½	—	4 ⅞ ₁₆	121	165	23	—	AN 26	AW 26	4.600

Adapter Sleeves

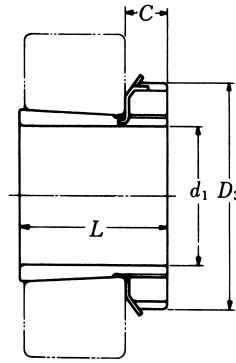

H 23

HE 23

HA 23

TAPER 1:12

Adapter ¹⁾ Part No.	d ₁				L mm	D ₃ mm	C mm	C ₁ ⁵⁾ mm	Lock Nut	Lock Washer	Weight (kgs)
	H mm	HE ²⁾ in	HS ³⁾ in	HA ⁴⁾ in							
H 2328	125	5	—	4 ¹⁵ / ₁₆	131	180	24	—	AN 28	AW 28	5.550
H 2330	135	5 ¹ / ₄	—	5 ³ / ₁₆	139	195	26	—	AN 30	AW 30	6.630
H 2332	140	5 ¹ / ₂	—	5 ⁷ / ₁₆	147	210	28	—	AN 32	AW 32	9.140
H 2334	150	6	—	5 ¹⁵ / ₁₆	154	220	29	—	AN 34	AW 34	10.200
H 2336	160	6 ¹ / ₂	—	6 ⁷ / ₁₆	161	230	30	—	AN 36	AW 36	11.300
H 2338	170	6 ³ / ₄	—	6 ¹⁵ / ₁₆	169	240	31	—	AN 38	AW 38	12.600
H 2340	180	7	—	7 ³ / ₁₆	176	250	32	—	AN 40	AW 40	13.900
H 2344	200	8	—	—	186	280	35	—	HN 44	AW 44	17.700
H 2348	220	—	—	—	199	300	37	—	HN 48	AW 48	20.700
H 2352	240	—	—	—	211	330	38	—	HN 52	AW 52	25.400
H 2356	260	—	—	—	224	350	39	—	HN 56	AW 56	29.100

Note :

1) Adapter sleeves are supplied complete with lock nuts and lock washers or lock plates °

整組緊定套附螺母及華司或鎖定片 °

2) Adapter sleeves for these bores are designated HE , e.g. HE2305 ° 此欄套筒內徑規格為 HE , 例如 HE2305 °

3) Adapter sleeves for these bores are designated HS , e.g. HS2305 ° 此欄套筒內徑規格為 HS , 例如 HS2305 °

4) Adapter sleeves for these bores are designated HA , e.g. HA2306 ° 此欄套筒內徑規格為 HA , 例如 HA2306 °