


# Adapter Sleeves

**H 2**  
**HE 2**  
**HS 2**  
**HA 2**

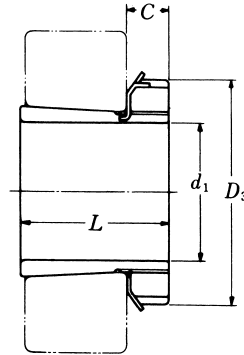

TAPER 1:12

Adapter <sup>1)</sup> Part No.	d <sub>1</sub>				L mm	D <sub>3</sub> mm	C mm	Lock Nut	Lock Washer	Weight (kgs)
	H mm	HE <sup>2)</sup> in	HS <sup>3)</sup> in	HA <sup>4)</sup> in						
H 204	17	—	—	—	24	32	7	AN 04	AW 04	0.041
H 205	20	¾	⅞	—	26	38	9	AN 05	AW 05	0.070
H 206	25	1	⅞	⅝ <sub>16</sub>	27	45	9	AN 06	AW 06	0.099
H 207	30	—	1 ⅛	1 ⅜ <sub>16</sub>	29	52	10	AN 07	AW 07	0.125
H 208	35	1 ¼	1 ⅜	1 ⅝ <sub>16</sub>	31	58	11	AN 08	AW 08	0.174
H 209	40	1 ½	1 ⅝	1 ⅞ <sub>16</sub>	33	65	12	AN 09	AW 09	0.227
H 210	45	1 ¾	1 ⅝	1 ⅞ <sub>16</sub>	35	70	13	AN 10	AW 10	0.274
H 211	50	2	1 ⅞	1 ⅝ <sub>16</sub>	37	75	13	AN 11	AW 11	0.308
H 212	55	—	2 ⅛	—	38	80	13	AN 12	AW 12	0.346
H 213	60	2 ¼	2 ⅜	2 ⅜ <sub>16</sub>	40	85	14	AN 13	AW 13	0.401
H 214	60	—	—	—	41	92	14	AN 14	AW 14	0.593
H 215	65	2 ½	—	2 ⅞ <sub>16</sub>	43	98	15	AN 15	AW 15	0.707
H 216	70	2 ¾	—	2 ⅞ <sub>16</sub>	46	105	17	AN 16	AW 16	0.882
H 217	75	3	—	2 ⅝ <sub>16</sub>	50	110	18	AN 17	AW 17	1.020
H 218	80	—	—	3 ⅜ <sub>16</sub>	52	120	18	AN 18	AW 18	1.190
H 219	85	3 ¼	—	—	55	125	19	AN 19	AW 19	1.370
H 220	90	3 ½	—	3 ⅞ <sub>16</sub>	58	130	20	AN 20	AW 20	1.490
H 221	95	—	—	—	60	140	20	AN 21	AW 21	1.720
H 222	100	4	—	3 ⅝ <sub>16</sub>	63	145	21	AN 22	AW 22	1.930

Note :

- 1) Adapter sleeves are supplied complete with lock nuts and lock washers °  
 整組緊定套附螺母及華司 °
- 2) Adapter sleeves for these bores are designated HE, e.g. HE205 °  
 此欄套筒內徑規格為 HE , 例如 HE205 °
- 3) Adapter sleeves for these bores are designated HS, e.g. HS205 °  
 此欄套筒內徑規格為 HS , 例如 HS205 °
- 4) Adapter sleeves for these bores are designated HA, e.g. HA206 °  
 此欄套筒內徑規格為 HA , 例如 HA206 °